




- Tilt-up / Exposed concrete applications
- 2 sizes per chair / low inventory
- Maximum concrete consolidation
- Minimal Footprint

Model #	Chair Height	Box Count	Skid Count	Boxes per Skid	Load Rating
RTC-100	1" - 1.25" (25-35mm)	1,000	36,000	36	850 lb
RTC-150	1.5" - 1.75" (35-45mm)	700	25,200	36	850 lb
RTC-200	2" - 2.25" (50-58mm)	400	14,400	36	850 lb
RTC-250	2.5" - 2.75" (65-70mm)	350	12,600	36	850 lb
RTC-300	3" - 3.5" (75-90mm)	250	7,000	28	850 lb
RTC-325	3.25" - 3.75" (85-95mm)	200	5,600	28	850 lb
RTC-400	4" - 4.5" (100-115mm)	175	4,900	28	850 lb
RTC-425	4.25" - 4.75" (108-120mm)	150	4,200	28	850 lb
RTC-500	5" - 5.5" (130-145mm)	120	3,360	28	850 lb
RTC-525	5.25" - 5.75" (135-145mm)	100	2,800	28	850 lb
RTC-600	6" - 6.5" (150-165mm)	150	3,000	20	850 lb
RTC-625	6.25" - 6.75" (160-170mm)	125	2,500	20	850 lb
RTC-700	7" - 7.5" (180-190mm)	100	2,000	20	850 lb
RTC-725	7.25" - 7.75" (185-195mm)	90	1,800	20	850 lb
RTC-800	8" - 8.5" (200-215mm)	80	1,600	20	850 lb
RTC-825	8.25" - 8.75" (210-225mm)	70	1,400	20	850 lb

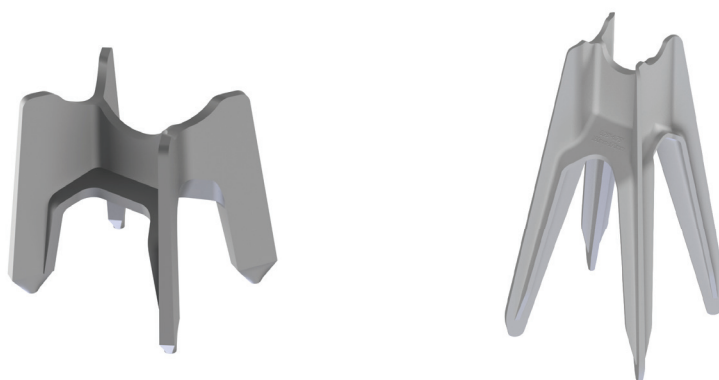